

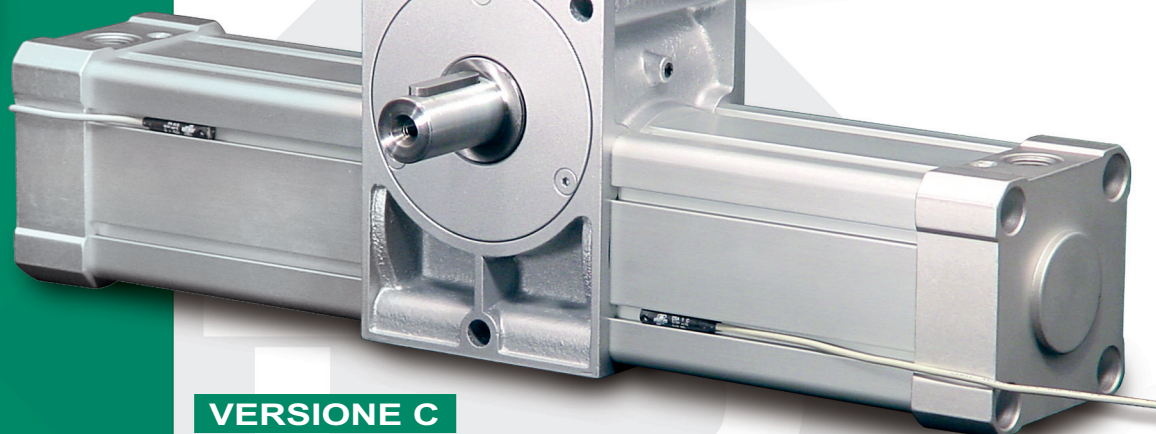
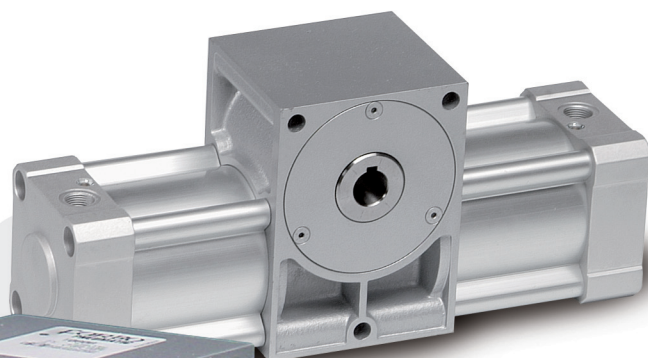


STANDARD

VERSIONE M

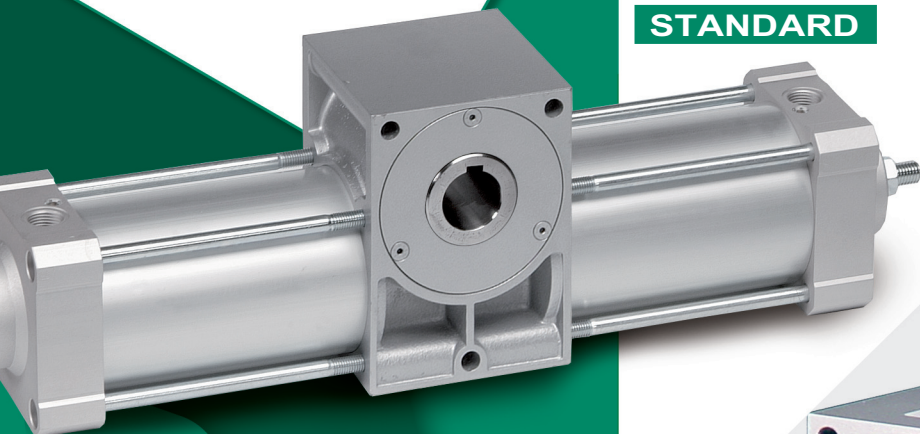

VERSIONE C



Alesaggio
 $\varnothing 25 \div \varnothing 100$ mm.
 Paracolpi elastici
 Disponibili in 3 profili:
 standard, "Mickey Mouse"
 e profilo pulito
 Pistone Magnetico

Bore
 $\varnothing 25 \div \varnothing 100$ mm.
 Shock pads
 Available in 3 profiles:
 standard, "Mickey Mouse"
 and clean profile
 Magnetic Piston

Nell'ottica del costante miglioramento e sviluppo del prodotto e con l'obiettivo di offrire sempre maggiori vantaggi e versatilità d'impiego, FARBO propone la **nuova unità rotante serie "T"**.

Intercambiabile con la storica serie "R", l'unità "T" è ancora più flessibile grazie ad alcuni accessori di serie ed alle guarnizioni in PUR poliuretano che garantiscono un'eccellente durata anche in assenza di lubrificazione. Inoltre il nuovo profilo, pulito e compatto, permette un rapido e facile alloggiamento dei sensori e ne rende il design moderno ed ancora più funzionale.

The new Rotary actuator "T" series is interchangeable with the "R" one and represents the Farbo's attention in providing new benefits to the customer ever developing new products.

Thanks to standard accessories and seals in polyurethane, "T" unit increases its flexibility and its working life also without lubrication.

The body shape is clean, compact and avoids any problem to insert sensors and it gives to the actuators a modern design, suitable for all the applications.

CARATTERISTICHE TECNICHE:

- Pressione di esercizio
- Temperatura dell'ambiente di lavoro
- Funzionamento con o senza aria lubrificata.



min 2 bar
max 12 bar




min -10°C
max +85°C



TECHNICAL SPECIFICATIONS:

- Working pressure
- Ambient temperature ranging
- Suitable for oil-free operation.

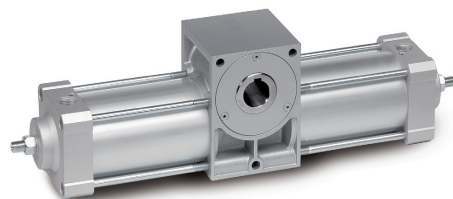


T 0 2 5 A . F R

Versione base Standard version			Rotazione di serie Standard rotation	Rotazione intermedia Intermediate rotation	Suffissi opzioni in ordine alfabetico Options code in alphabetical order		
T025	T050	T080	A B C				
T032	T063	T100					
T040	T070	T1SD					

CODICE • CODE	T025	T032	T040	T050	T063	T070	T080	T100	T1SD
Ø mm	25	32	40	50	63	80	80	100	100 (2x)

Rotazione di Serie Standard rotation	A	90°	T025A	T032A	T040A	T050A	T063A	T070A	T080A	T100A	T1SDA
	B	180°	T025B	T032B	T040B	T050B	T063B	T070B	T080B	T100B	T1SDB
	C	360°	T025C	T032C	T040C	T050C	T063C	T070C	T080C	T100C	T1SDC

C	Profilo alluminio pulito per sensori a scomparsa Clean aluminium profile for hidden sensors			●	●	●	●	●	●	●	●
D	Senza ammortizzatori Without cushions		●	●	●	●	●	●	●	●	●
E	Pignone base con diametro maggiore Standard pinion with increased bore		●	○	○	○	○	○	○	○	○
F	Pignone con foro standard in H7 Pinion with standard hole (H7 quality)		●	●	●	●	●	●	●	●	●
G	Pignone con foro maggiorato in H7 Pinion with increased hole (H7 quality)					●		○	●	●	●
H	Funzionamento idraulico Hydraulic operation	P max = 20 bar	●	●	●	●	●	●	●	●	(1)
M	Con profilo alluminio "Mickey Mouse" "Mickey Mouse" aluminium profile			●	●	●	●	●	●	●	●
N	Trattamento Niploy Process Electroless Nickel plating		○	○	○	○	○	○	○	○	○
Q	Con quadro posteriore With rear square key		●	●	●	●	●	●	●	●	●
R	Con 2 registri di rotazione With 2 rotation adjustment screws		●	●	●	●	●	●	●	●	●
S	Con stelo sporgente destro With right side protruding piston rod			○	○	○	○	○	○	○	○
T	Con stelo sporgente sinistro With left side protruding piston rod			○	○	○	○	○	○	○	○
V	Guarnizioni Viton® Viton® Seals	 +180 °C -10 °C	●	●	●	●	●	●	●	●	●
Z	Con 8 filetti With 8 threads			●	●	●	●	●	●	●	●

● = Opzione di serie - Standard option

○ = Opzione su richiesta - Option on request

(1) = Con l'opzione H non è possibile richiedere anche l'opzione R

(1) = With H option; the R option is not available